




## 5.2 VIGA DELTA D3-PREF y D4-PREF



VIGA DELTA D3PREF

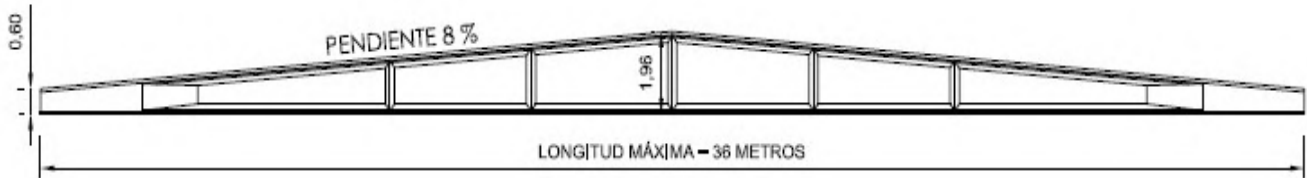

VIGA DELTA D4PREF

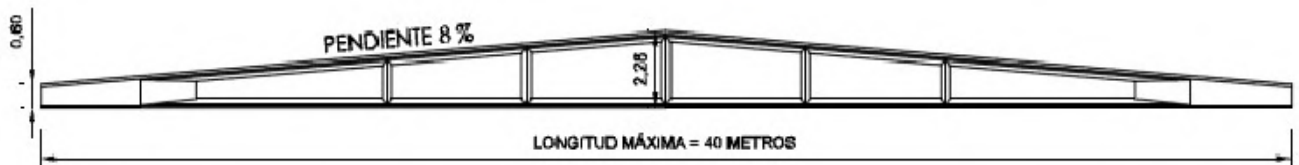

VIGA TIPO DELTA	D3	D3	D3	D3	D3	D3	D3	D4
LONGITUD (M)	26,00	28,00	30,00	32,00	34,00	36,00	38,00	40,00
PESO ( Kn/ml)	5,65	5,75	5,70	5,80	5,75	5,85	5,80	5,85



TIPO DE HORMIGON: PRETENSADO HP-50  
 RESISTENCIA A COMPRESIÓN: Armado= fck: 50 N/mm<sup>2</sup>  
 TIPO DE ACERO PARA PRETENSADO: Y 1860 S7

DIAMETRO mm	9.3	13.0	15.2	16.0
RESISTENCIA ÚLTIMA TRACCIÓN MPa	1860	1860	1860	1860
LIMITE ELASTICO EN KN AL 0.1 %	82.2	158.0	221.0	237.0
RESISTENCIA AL FUEGO: R-30				